




BIA 型机械密封

技术参数

非平衡型	Unbalanced
单端面密封	Single Seal
任意旋向	Independent on Direction of Rotation
橡胶波纹管	Elastomer Bellows
介质温度	Temperature of Medium: $-20^{\circ}\text{C}\sim 150^{\circ}\text{C}$
介质压力	Pressure of Medium: $0\sim 0.6\text{MPa}$
线速度	Line Speed: $\leq 10\text{m/sec}$

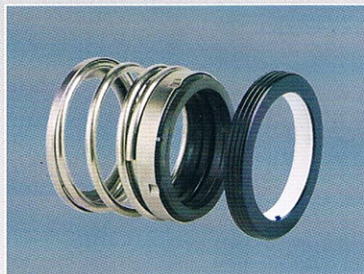

BOA型



BIA型

规格	尺寸	d	D	D1	d1	D0	D2	D3	L	L1	L2	L3
		h6	H8		+0.5 +0.3							
MO-14	14	30	17	22.4	27	21	21	25	18.7	5	4.5	12
MO-16	16	32	18	23	28.5	23	27	27	21	5	4.5	12
MO-18	18	35	21	25.5	30.5	27	33	21	7.5	6	13.5	
MO-20	20	35	24	26	31.8	29	35	21	8	6.5	13.5	
MO-25	25	40	27	34	39	34	40	25.5	8	6.5	13	
MO-28	28	43	30	36.5	42	37	43	25.5	8	6.5	12.5	
MO-30	30	45	32	38.5	44	39	45	25.5	9	7.5	12	
MO-32	32	48	34	40	46	42	48	33.5	9	7.5	12	
MO-33	33	48	35	40.5	47	42	48	33.5	9	7.5	12	
MO-35	35	50	37	42.5	49	44	50	33.5	9	7.5	12	
MO-38	38	56	40	46.5	54	49	56	33.5	9	7.5	13	
MO-40	40	58	42.5	48	56	51	58	33.5	9	7.5	13	
MO-43	43	61	45.5	51	59	54	61	36.5	9.5	8	13	
MO-45	45	63	47.5	52.5	61	56	63	38	9.5	8	13	
MO-48	48	66	50.5	55.5	64	59	66	38	9.5	8	13	
MO-50	50	70	52.5	57	66	62	70	38	9.5	8	13.5	
MO-53	53	73	55.5	60	69	65	73	41	9.5	8	13.5	
MO-55	55	75	57.5	62	71	67	75	41	9.5	8	13.5	
MO-58	58	78	60.5	68	78	70	78	42	9.5	8	13.5	
MO-60	60	80	62.5	70	80	72	80	42	9.5	8	13.5	
MO-70	70	92	73	80	90	83	92	45	11	9.5	14.5	
MO-80	80	105	83	90	104	95	105	55	12	10	15	
MO-85	85	109	88	95	108	100	110	64.2	12	10	15	
MO-90	90	115	93	100	114	105	115	66.2	12	10	15	