

MG1109 型机械密封

技术参数

适用范围: 水油、弱酸、弱碱、污水等介质。

适用温度: 丁腈橡胶: -20°C-100°C



氟橡胶: -20°C-200°C

适用压力: ≤1MPa

Applicable scope: water, oil, weak acid, weak alkali and sewage and other media

Applicable temperature: acrylonitrile rubber: -20°C-100°C
fluorine rubber: -20°C-200°C

Applicable pressure: ≤1 Mpa

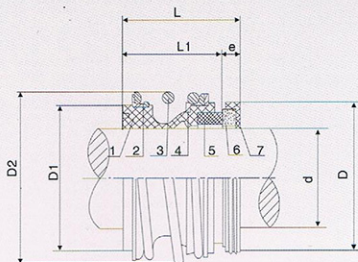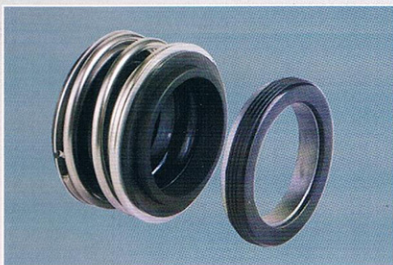

1.橡胶波纹管

2.后紧川

3.弹簧

4.前紧川

Rubber corrugated pipe

Rear Straining Ring

Spring

Front Straining Ring

5.动环

6.静环

7.静环密封垫

Moving Ring

Stationary Seal Ring

Gasket of Stationary Seal Ring

Stationary Seal Ring

规格	尺寸	d	D	D1	D2	L	L1	E	备注
109-18		18	33	29	33	27	19.5	7.5	
109-20		20	35	33	38	29	21.5	7.5	
109-25		25	40	38	44	30.5	23	7.5	
109-30		30	45	44	50	34	26.5	7.5	
109-35		35	50	50	59	36	28.5	7.5	
109-40		40	58	55	64	39	30	9	
109-45		45	63	60	70	39	30	9	
109-50		50	70	65	77	40	30.5	9.5	
109-55		55	75	72	83	46	35	11	
109-60		60	80	79	91	49	38	11	
109-65		65	85	84	96	51	40	11	
109-70		70	92	90	103	51	40	11	
109-75		75	97	95	110	51	40	11	
109-80		80	105	100	116	52	40	12	
109-85		85	110	107	124	55	41	14	
109-90		90	115	114	131	59	45	14	
109-95		95	120	119	136	60	46	14	
109-100		100	125	124	140	61	47	14	

如果长度不够安装，可以加垫。

本系列产品属单端面、单弹簧、非平衡橡胶波纹管机械密封，可以任意旋向。

109系列是常用的密封，结构参照国外的同类产品设计，它设计精巧、外形美观，具有多种功能，通过动环更换成各种材料。可在含有颗粒的废水、污水中应用。109系列也可用于串联式或背对背式的双端面密封。

This series is a kind of mechanical seal of single-face, single spring and non-equilibrium structure used in rubber corrugated pipes. It can turn at any direction.

109 series is a kind of common seal component designed according to the structure of similar product at abroad. It is elaborately designed with beautiful appearance and multiple functions. It can be used in wastewater and sewage with granule by changing the material of moving ring. 109 series can also be used in double face sealing in series connection or of back-to-back type.